

Installing the LED Synch Indication to Revox B77 Counter

Preliminary remark:

- Only disassembly of the body is described, mounting of the front panel and the pinchroller follows accordingly.
- Of course the following steps of installing should be done with turned off machine and no power condition !!

Step-by-step:

1. Screw off the pinchroller with a phillips screwdriver and pull it off. Take care of the nylon washer und precision ring:




2. Remove the phillips screws from the front panel – when remounting be careful when tightening screws, plastic material of the machines is 25 years old!
3. Press tape guide or pressure arm next to the playback head upward so the screen closes, then take off front panel:




4. Remove the phillips screw of the tape counter and adjust the LED holder with it.
5. Place LED in position between figures 2 and 3 , take care it doesn't grind against the reset mechanic.

Put cable through hole as shown

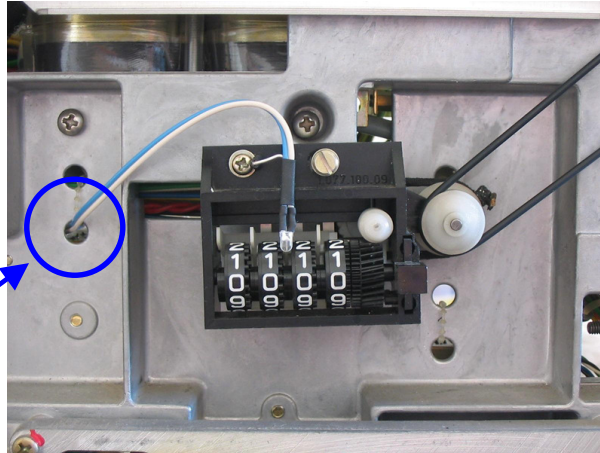

Now from the backside:

6. Remove connecting wire from Quartz-Control cable and plug in the connector – blue to blue:

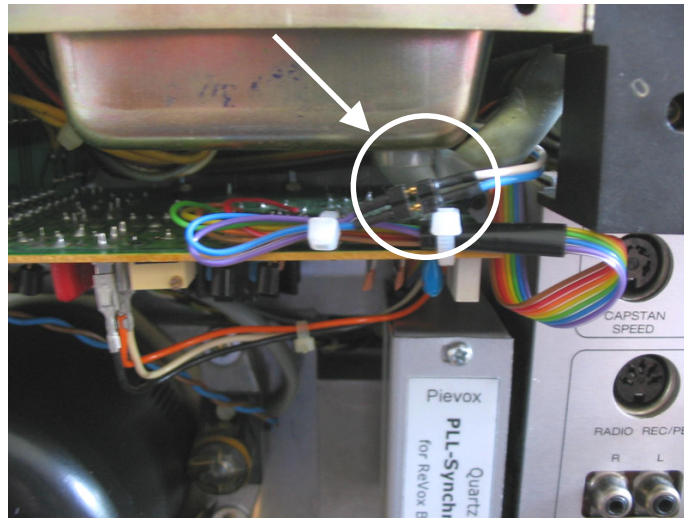

7. Now connect the B77 to the main outlet and switch on. Take care to avoid electric shock!
8. Check function.
9. Then disconnect your B77 again from the main outlet and mount body of machine.