


## Installing *Revox PR99 PAUSE MEMORY*

Before installing you have the possibility to choose between two different modes for Pause Memory PR99:

Jumper = small red bridge connector on the board

### 1. **Standardfunction**


Jumper on **BOTH** pins  
(as delivered):

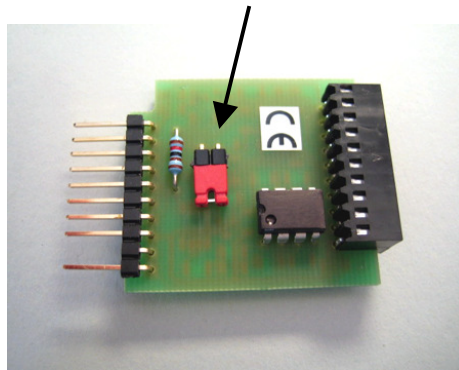


- recording starts immediately
- just pause memory is working.
- Pressing any button initiates the desired reel movement

### 2. **special function**

Jumper **just to ONE**  
of the pins:


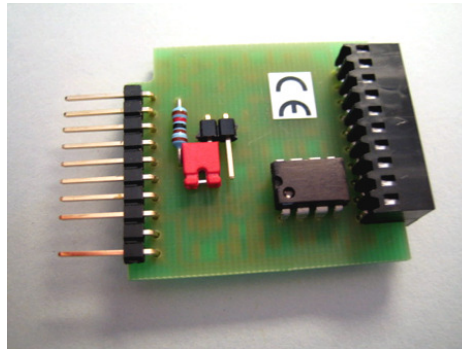


- Connecting the jumper to one pin, you can switch from PAUSE to PLAY or REC, preventing the PR99 to start running.
- Recording starts without a clicking sound.
- Reel funktion PLAY or REC is started then by pressing PAUSE button again.

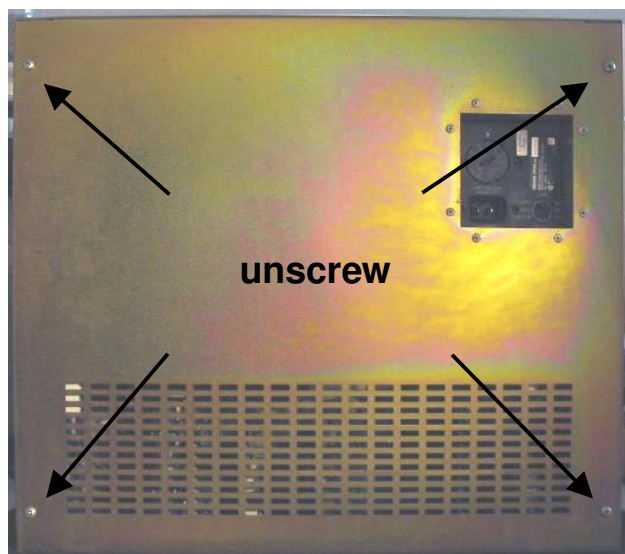


Unscrew the four phillips screws on the backside of the PR99 case:

This connector is to be pulled out

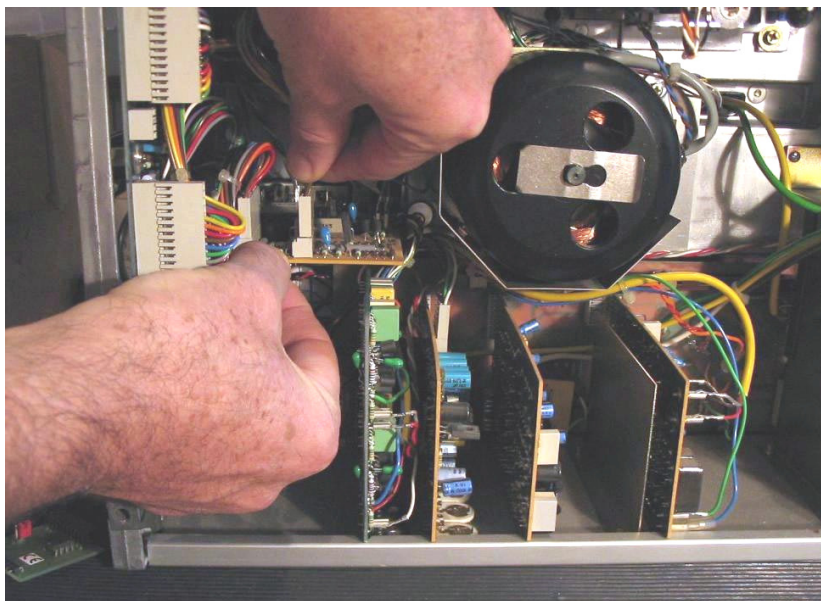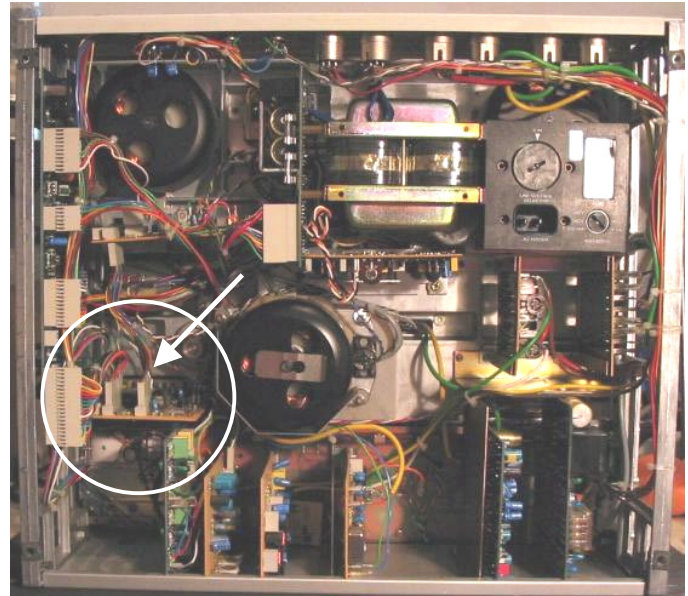


Pull connector out  
stabilize the board with your  
other hand

Plug connector  
in module PR99 Pause  
Memory


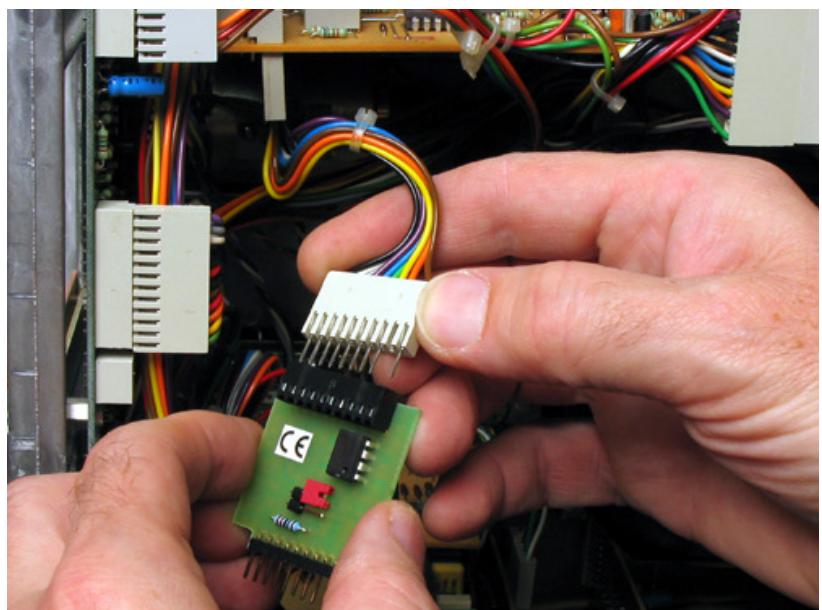




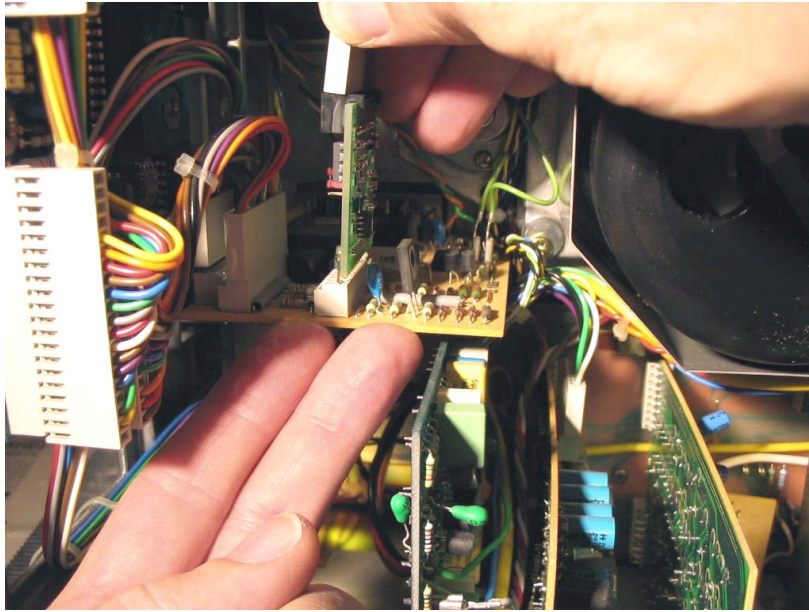

Plug in PR99 Pause Memory using the other hand for counter-pressure

PR99 Pause Memory installed

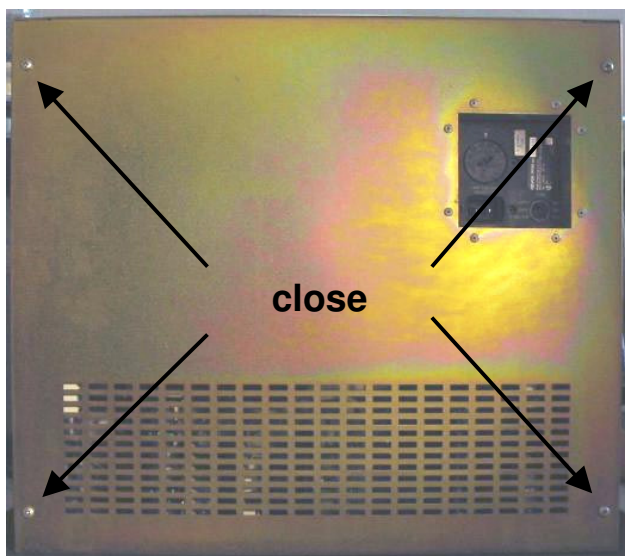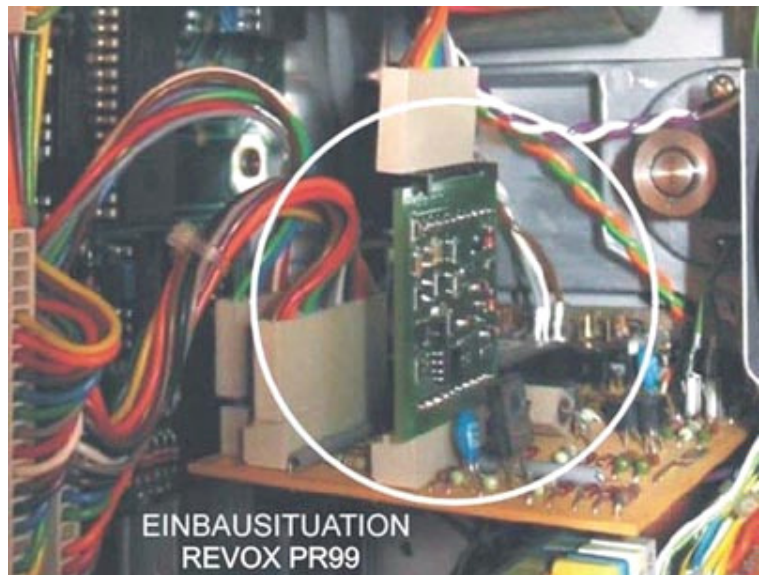

installing complete – enjoy your new Pause Memory !